

Delphion

Worldwide Intellectual Property Search

RESEARCH

INTEGRATED IAM

SERVICES

INSIDE DEL

The Delphi n Integrated View

Buy Now: PDF | More choices...

Tools: Add to Work File: Create new

View: Expand Details | INPADOC | Jump to: Top

Go to: Derwent...

Title: WO9304607A1: DEPILATORY DEVICE

Country: WO World Intellectual Property Organization (WIPO)

Kind: A1 Publ. of the Int. Appl. with int. search report

Inventor: CLEYET, Aimé;
GABION, Georges;
ROGER, Robert;

Assignee: BRAUN AKTIENGESSELLSCHAFT
CLEYET, Aimé
GABION, Georges
ROGER, Robert
News, Profiles, Stocks and More about this company

Published / Filed: March 18, 1993 / Aug. 20, 1992

Application Number: WO1992EP0001910

IPC Code: A45D 28/00;

Priority Number: Aug. 28, 1991 FR199100001069Z

Abstract:

Described is a depilatory device for removing hair from the human body, the device having a housing which can be held in the user's hand, a motor-driven rotating cylinder fitted with pincer elements, and at least one actuator element which passes through the rotating cylinder and is designed to actuate the pincer elements coupled to it. The actuator element is driven via a cam disc by a rotatably mounted pressure-exerting element associated with it, and is displaced against the pressure of a spring, the cam disc being designed as a control element with a control cam which makes contact with the pressure-exerting element.

[Show in French]

INPADOC Show legal status actions

Legal Status: AT BE CH DE DK ES FR GB GR IE IT JP KR LU MC NL SE US

Designated Country:

Family: Show 5 known family members

Description: Expand full description

First Claim:

Show all claims

1. Epliationsgerät zum Entfernen von Haaren am menschlichen Körper mit einem Gehäuse (1), das vom Benutzer in der Hand gehalten werden kann, mit einem von einem Motor (3) angetriebenen, Klemmelemente (5, 6) aufweisenden Drehzylinder (7) und mit wenigstens einem den Drehzylinder (7) durchsetzenden Betätigungselement (9, 10) zur Betätigung der mittl

gekoppelten Klemmelemente (5, 6), wobei das Betätigungselement (9, 10) von einem diesem zugeordneten, drehbar gelagerten Druckelement (47) über eine Scheibe betätigbar und gegen den Druck einer Feder verschiebbar ist, dadurch gekennzeichnet, daß die Scheibe als Steuerelement (45) mit einer am Druckelement (47) anliegenden Steuerkurve (46) ausgebildet ist,

Other Abstract None

Info:



this for the Gallery...

© 1997-2002 Delphion, Inc. Research Subscriptions | Privacy Policy | Terms & Conditions | Site Map | Cont

- pivot action

- Cam is @ end of shaft

- no shaft cam.

- no other eng but equivalent

found.

FIG.1

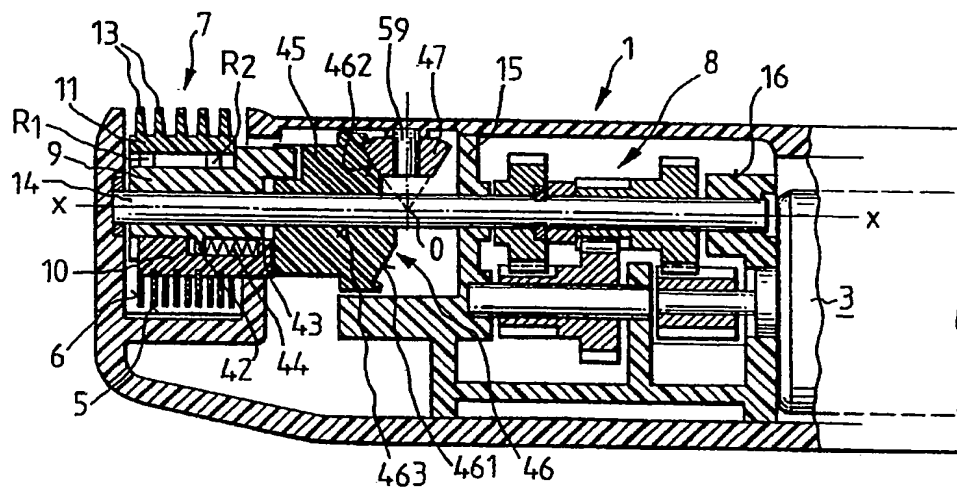


FIG.1a

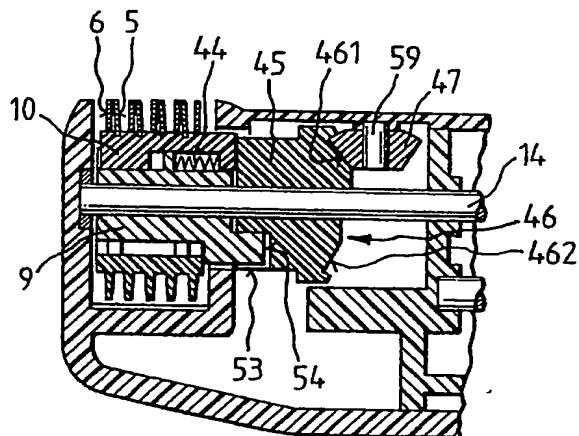


FIG.2

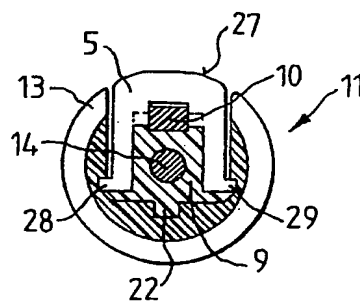


FIG.3

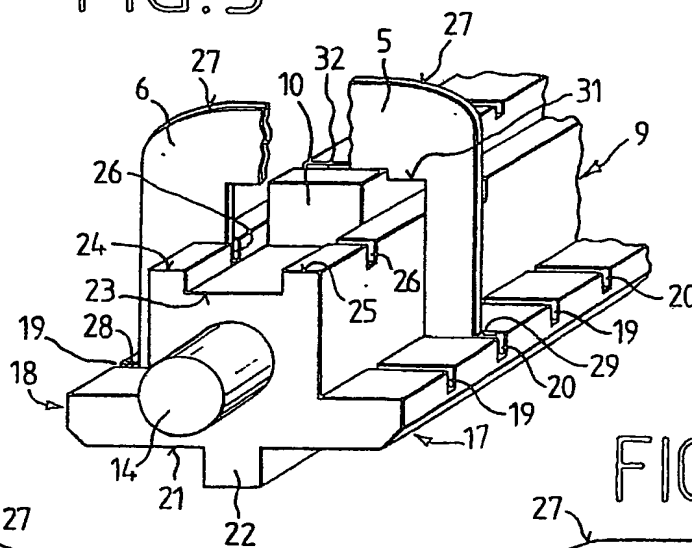


FIG.3a

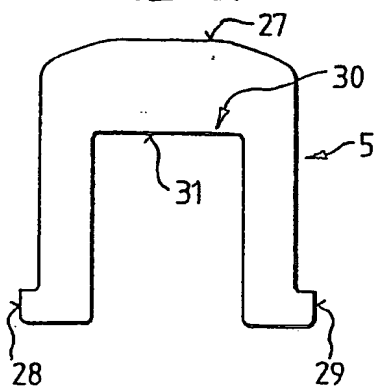


FIG.3b

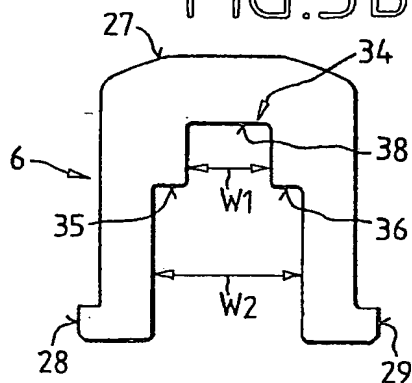


FIG.3c

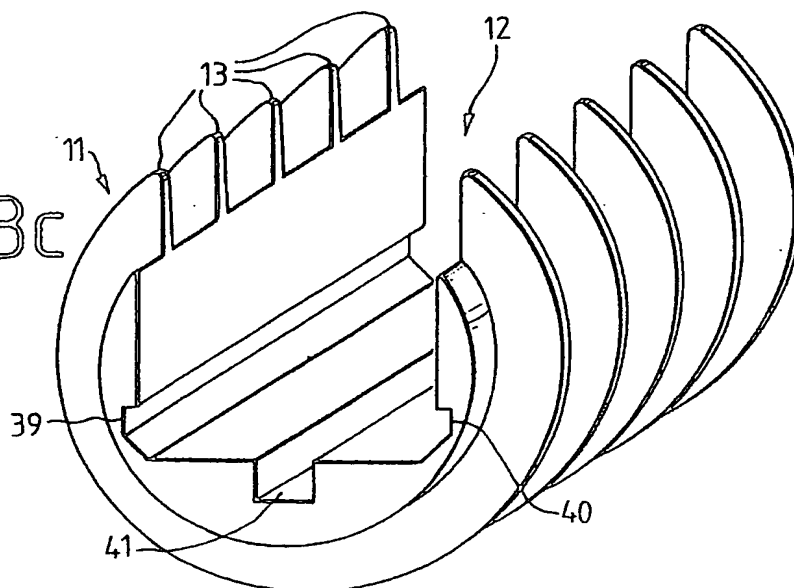


FIG.5

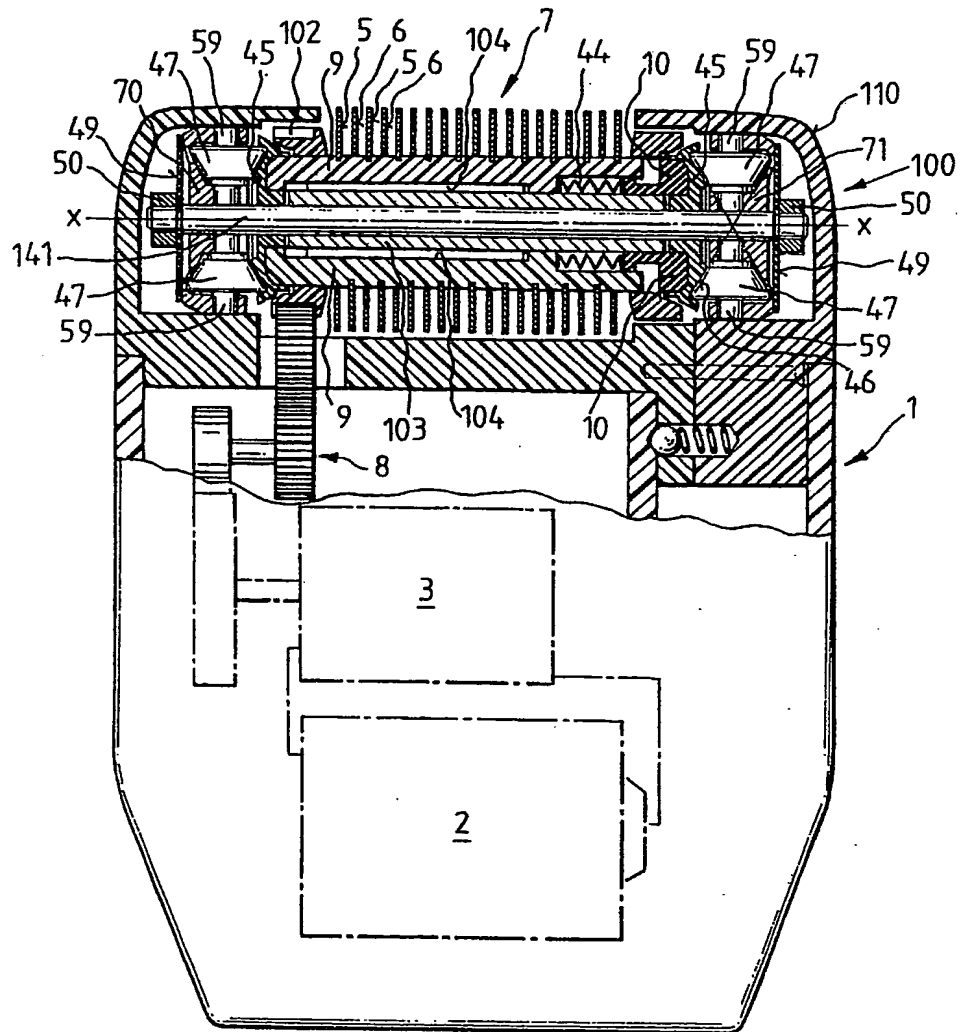


FIG.5a

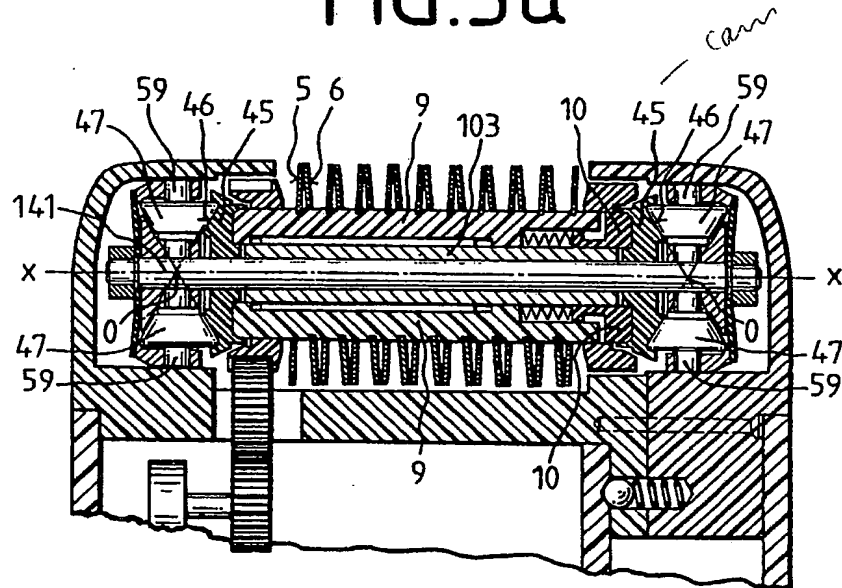


FIG.4

